



Green Perform Highbay Elite

BY718P LED200/NW PSD NB

Power supply unit with DALI interface - Symmetrical - Polycarbonate bowl/cover - 54°

GreenPerform Highbay Elite is the latest innovation in a successful range of highbay luminaires for high ceiling and industrial applications. The unique finless design has received the iF Design Award 2019 and Reddot Design Award 2019 for its aesthetic appeal. But this versatile luminaire offers a wealth of practical features too, including great light quality, high energy savings, a long lifetime at an affordable price and a wide variety of optics and lumen packages. The Green Perform Highbay Elite luminaire provides options for advanced connectivity with IoT-based systems and software applications including the Interact Pro system. If you're looking for a 'fit and forget' robust and reliable solution with connectivity advantages, Green Perform Highbay Elite is the smart choice.


Product data

| General information | | Protection class IEC | |
|-------------------------------|--|---|--|
| Light source colour | 840 neutral white | Protection class IEC | Safety class I (I) |
| Light source replaceable | No | Glow-wire test | 650/30 [Temperature 650 °C, duration 30 s] |
| Number of gear units | 1 unit | Flammability mark | F [For mounting on normally flammable surfaces] |
| Driver/power unit/transformer | PSD [Power supply unit with DALI interface] | CE mark | CE mark |
| Driver included | Yes | ENEC mark | - |
| Optic type | Symmetrical | Warranty period | 3 years |
| Optical cover/lens type | PC [Polycarbonate bowl/cover] | Constant light output | No |
| Luminaire light beam spread | 54° | Number of products on MCB (16 A type B) | 8 |
| Control interface | DALI | EU RoHS compliant | Yes |
| Cable | Cable 0.3 m without plug | | |


Green Perform Highbay Elite

| | |
|--|---|
| Light source engine type | LED |
| Operating and electrical | |
| Input Voltage | 220 to 240 V |
| Input frequency | 50 or 60 Hz |
| Inrush current | 53 A |
| Inrush time | 0.3 ms |
| Power factor (min.) | 0.95 |
| Controls and dimming | |
| Dimmable | Yes |
| Mechanical and housing | |
| Housing material | Aluminum |
| Reflector material | - |
| Optic material | Polycarbonate |
| Optical cover/lens material | Polycarbonate |
| Optical cover/lens finish | Frosted |
| Overall height | 445 mm |
| Overall diameter | 450 mm |
| Colour | Black and gray |
| Approval and application | |
| Ingress protection code | IP65 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK08 [5 J vandal-protected] |
| Initial performance (IEC compliant) | |
| Initial luminous flux (system flux) | 21500 lm |

| | |
|--|-------------------------|
| Luminous flux tolerance | +/-10% |
| Initial LED luminaire efficacy | 147 lm/W |
| Init. Corr. Colour Temperature | 4000 K |
| Init. Colour rendering index | >80 |
| Initial input power | 145 W |
| Power consumption tolerance | +/-10% |
| Over time performance (IEC compliant) | |
| Driver failure rate at 5,000 hours | 0.0021 % |
| Median useful life L70B50 | 75000 h |
| Application conditions | |
| Ambient temperature range | -30 to +50 °C |
| Maximum dimming level | 1% |
| Suitable for random switching | No |
| Product data | |
| Full product code | 911401572451 |
| Order product name | BY718P LED200/NW PSD NB |
| Order code | 01572451 |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 1 |
| SAP material | 911401572451 |
| Net Weight (Piece) | 7.700 kg |



Dimensional drawing

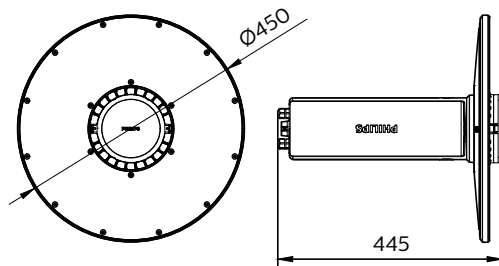

BY718P LED200/NW PSD NB

Green Perform Highbay Elite

