



Plusline Compact

Plusline C 150W R7s 230V 1CT/10X10F

Mains-voltage linear lamp giving white halogen light


Product data

General information	
Cap base	R7S [R7s]
Operating position	UNIVERSAL [Any or Universal (U)]
Nominal lifetime (nom.)	2000 h
Rated lifetime (hours)	2000 h
Light technical	
Luminous flux (nom.)	2400 lm
Luminous efficacy (rated) (nom.)	16 lm/W
Colour rendering index (nom.)	100
Operating and electrical	
Power (Rated) (Nom)	150 W
Lamp current (nom.)	0.65 A
Starting time (nom.)	0.0 s
Voltage (Nom)	230 V
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Lamp Finish	Clear

Cap-base information	10
Bulb shape	T3 [T 12mm (T3)]
Luminaire design requirements	
Bulb temperature (max.)	900 °C
Pinch temperature (max.)	350 °C
Product data	
Full product code	872790080887200
Order product name	Plusline C 150W R7s 230V 1CT/10X10F
EAN/UPC – product	8727900808872
Order code	80887200
SAP numerator – quantity per pack	1
Numerator – packs per outer box	100
SAP material	923919943202
Copy Net Weight (Piece)	0.005 kg
ILCOS code	HDG//RS-150-230-R7s-74,9

Plusline Compact

Dimensional drawing

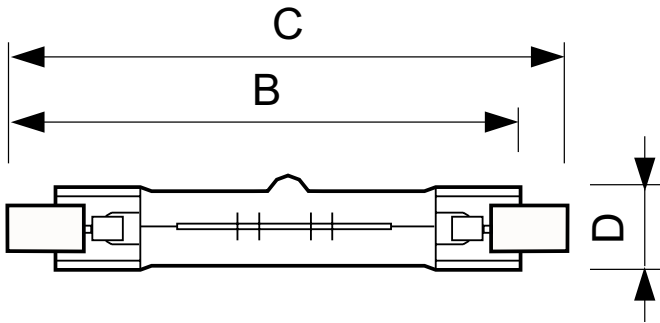

Product	D (max)	B (max)	B	B (min)	C (max)
Plusline C 150W R7s 230V 1CT/ 10X10F	15 mm	76.5 mm	74.9 mm	73.3 mm	78.3 mm

Plusline C 150W R7s 230V 1CT/10X10F

