



MASTER PL-C 4 Pin

MASTER PL-C 10W/830/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General information		Colour designation	
Cap base	G24Q-1 [G24q-1]	Colour designation	Warm White (WW)
Life to 50% failures preheat (nom.)	13000 h	Chromaticity coordinate X (nom.)	0.44
LSF preheat 2,000 hours rated	99 %	Chromaticity coordinate Y (nom.)	0.403
LSF preheat 4,000 hours rated	98 %	Correlated Colour Temperature (Nom)	3000 K
LSF preheat 6,000 hours rated	97 %	Luminous efficacy (rated) (nom.)	60 lm/W
LSF preheat 8,000 hours rated	90 %	Colour rendering index (nom.)	82
	Sphere	LLMF 2000 h Rated	92 %
		LLMF 4000 h Rated	87 %
		LLMF 6000 h Rated	83 %
		LLMF 8000 h Rated	81 %
Light technical		Operating and electrical	
Colour Code	830 [CCT of 3,000 K]	Power (Rated) (Nom)	10.4 W
Luminous flux (nom.)	600 lm		
Luminous flux (rated) (nom.)	600 lm		

MASTER PL-C 4 Pin

Lamp current (nom.)	0.190 A
Temperature	
Design temperature (nom.)	28 °C
Controls and dimming	
Dimmable	Yes
Mechanical and housing	
Cap-base information	4P
Approval and application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg
Energy consumption kWh/1,000 hours	11 kWh

	423296
Product data	
Full product code	871150062329470
Order product name	MASTER PL-C 10W/830/4P 1CT/5X10BOX
EAN/UPC – product	8711500623294
Order code	62329470
SAP numerator – quantity per pack	1
Local code description	4923652
Numerator – packs per outer box	50
SAP material	927907083040
Net Weight (Piece)	41.400 g
ILCOS code	FSQ-10/30/1B-E-G24q=1


Dimensional drawing




MASTER PL-C 10W/830/4P 1CT/5X10BOX

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 10W/830/4P 1CT/5X10BOX	27.1 mm	27.1 mm	75.5 mm	95.0 mm	109.9 mm

Photometric data

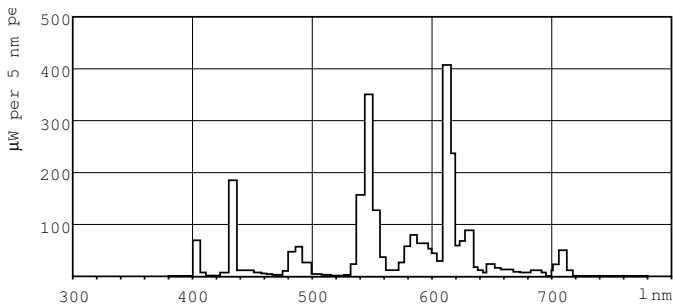

LDPB_PLC4P_830-Spectral power distribution B/W

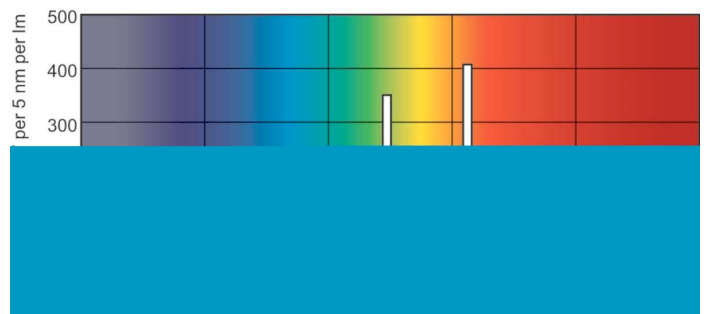

Lightcolour /830

MASTER PL-C 4 Pin

Lifetime



LDLE_PLC4P_0001-Life expectancy diagram

LDLE_PLC4P_0002-Life expectancy diagram



LDLM_PLC4P_0001-Lumen maintenance diagram

