



MASTER PL-S 4 Pin

MASTER PL-S 11W/830/4P 1CT/5X10BOX

MASTER PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic gear and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	2G7 [2G7]
Life to 50% failures preheat (nom.)	13000 h
LSF preheat 2,000 hours rated	99 %
LSF preheat 4,000 hours rated	98 %
LSF preheat 6,000 hours rated	97 %
LSF preheat 8,000 hours rated	92 %
LSF preheat 16,000 hours rated	30 %
	Sphere
Light Technical	
Colour Code	830 [CCT of 3,000 K]
Luminous flux (nom.)	900 lm
Luminous flux (rated) (nom.)	900 lm


Colour designation	Warm White (WW)
Chromaticity coordinate X (nom.)	0.44
Chromaticity coordinate Y (nom.)	0.403
Correlated Colour Temperature (Nom)	3000 K
Luminous efficacy (rated) (nom.)	82 lm/W
Colour rendering index (nom.)	82
LLMF 2000 h Rated	95 %
LLMF 4000 h Rated	92 %
LLMF 6000 h Rated	90 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	86 %
Operating and Electrical	
Power (Rated) (Nom)	11.9 W

MASTER PL-S 4 Pin

Lamp current (nom.)	0.160 A
Temperature	
Design temperature (nom.)	28 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-base information	4P
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	1.4 mg
Mercury (Hg) content (nom.)	1.4 mg

Energy consumption kWh/1,000 hours	12 kWh
	423600
Product Data	
Full product code	871150026119970
Order product name	MASTER PL-S 11W/830/4P 1CT/5X10BOX
EAN/UPC – product	8711500261199
Order code	26119970
SAP numerator – quantity per pack	1
Numerator – packs per outer box	50
SAP material	927936683011
SAP net weight (piece)	41.000 g
ILCOS code	FSD-11/30/1B-E-2G7



Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 11W/830/4P 1CT/5X10BOX	28 mm	13 mm	196 mm	214 mm	219.9 mm

PL-S 11W/830/4P LM

Photometric data

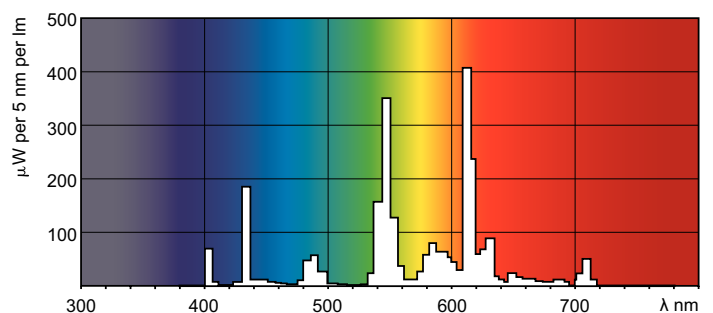
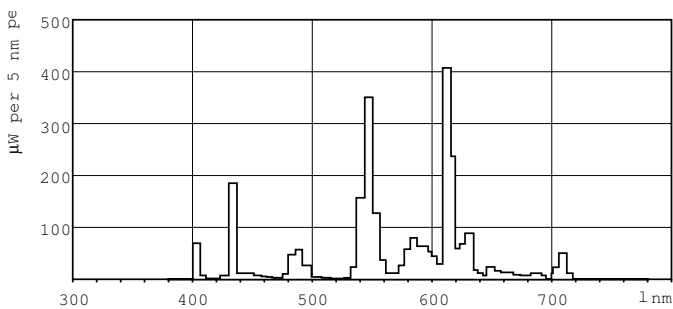


LDPB_PLS4PLM_830-Spectral power distribution B/W

Lightcolour /830


MASTER PL-S 4 Pin

Lifetime

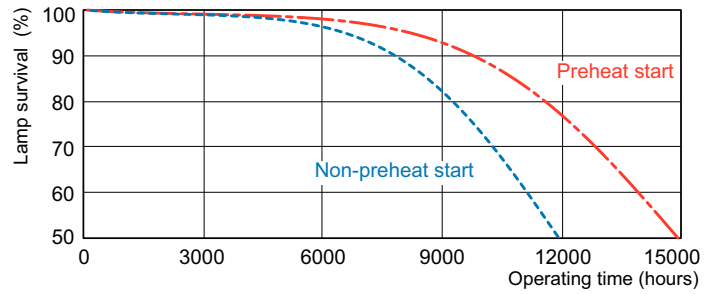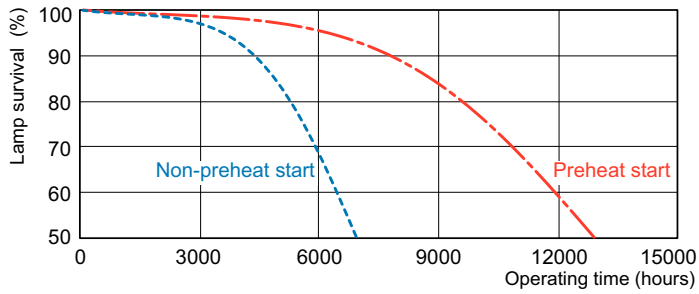

LDLE_PLS4PLM_0001-Life expectancy diagram

LDLE_PLS4PLM_0002-Life expectancy diagram



LDLM_PLS4PLM_0001-Lumen maintenance diagram

