



DigiStreet

BGP763 LED260-/740 I DX10 DGR 32-48

DigiStreet Large - LED module 26000 lm - 740 neutral white - Safety class I (I) - Distribution extra-wide 10 - Dark gray - Luminaire surge protection level up to 6 kV differential mode and 8 kV common mode - Spigot for diameter 32-48 mm

Developed with the aim of becoming your long-term partner, the system-ready architecture of DigiStreet enables you to enjoy the benefits of connected lighting systems today and also gets the city ready for the innovations to come! Its two sockets enable you to connect directly to the Philips CityTouch system and it is also prepared to connect you to the future innovations of IoT. Next to this, each individual luminaire is uniquely identifiable, thanks to the Philips Service tag application. With a simple scan of a QR code, placed on the inside of the mast door, you gain instant access to the luminaire configuration, making maintenance and programming operations faster and easier, no matter what stage of the luminaire's lifetime. DigiStreet is also equipped with dedicated light recipes that: 1) maintain optimal ecosystems for bats or 2) preserve a dark night sky.

Product data

| General Information | | Connection | |
|-------------------------------|-------------------------------|----------------------|------------------------------|
| Lamp family code | LED260 [LED module 26000 lm] | Connection | SI [Screw connection block] |
| Light source colour | 740 neutral white | Cable | - |
| Light source replaceable | Yes | Protection class IEC | Safety class I (I) |
| Number of gear units | 2 units | Flammability mark | NO [-] |
| Driver/power unit/transformer | PSU [Power supply unit] | CE mark | CE mark |
| Driver included | Yes | ENEC mark | ENEC mark |
| Optical cover/lens type | FG [Flat glass] | Warranty period | 5 years |
| Luminaire light beam spread | 150° - 43° x 67° | Optic type outdoor | Distribution extra-wide 10 |
| Control interface | - | | |

| | |
|---|--|
| Remarks | * At extreme ambient temperatures the luminaire might automatically dim down to protect components |
| Constant light output | No |
| Number of products on MCB (16 A type B) | 4 |
| EU RoHS compliant | Yes |
| LED engine type | LED |
| Serviceability class | Class A, the luminaire is equipped with serviceable parts (when applicable): LED board, driver, control units, surge-protection device, optics, front cover and mechanical parts |
| Product family code | BGP763 [DigiStreet Large] |

Light Technical

| | |
|--------------------------------|----|
| Upward light output ratio | 0 |
| Standard tilt angle post-top | 0° |
| Standard tilt angle side entry | 0° |

Operating and Electrical

| | |
|---------------------|-------------|
| Input Voltage | 220–240 V |
| Input frequency | 50 to 60 Hz |
| Inrush current | 53 A |
| Inrush time | 0.3 ms |
| Power factor (min.) | 0.99 |

Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Mechanical and Housing

| | |
|-----------------------------|---------------------------------------|
| Housing material | Aluminum die-cast |
| Reflector material | Polycarbonate |
| Optic material | Acrylate |
| Optical cover/lens material | Glass |
| Fixation material | Stainless steel |
| Mounting device | 32/48 [Spigot for diameter 32-48 mm] |
| Optical cover/lens shape | Flat |
| Optical cover/lens finish | Clear |
| Overall length | 1011 mm |
| Overall width | 361 mm |
| Overall height | 121 mm |
| Effective projected area | 0.08 m ² |

| | |
|-------------------------------------|--|
| Colour | Dark gray |
| Dimensions (height x width x depth) | 121 x 361 x 1011 mm (4.8 x 14.2 x 39.8 in) |

Approval and Application

| | |
|--|--|
| Ingress protection code | IP66 [Dust penetration-protected, jet-proof] |
| Mech. impact protection code | IK09 [10 J] |
| Surge protection (common/differential) | Luminaire surge protection level up to 6 kV differential mode and 8 kV common mode |

Initial Performance (IEC Compliant)

| | |
|-------------------------------------|----------------------|
| Initial luminous flux (system flux) | 22100 lm |
| Luminous flux tolerance | +/-7% |
| Initial LED luminaire efficacy | 140 lm/W |
| Init. Corr. Colour Temperature | 4000 K |
| Init. colour rendering index | 70 |
| Initial chromaticity | (0.38, 0.38) SDCM <5 |
| Initial input power | 158 W |
| Power consumption tolerance | +/-11% |

Over Time Performance (IEC Compliant)


| | |
|---|------|
| Control gear failure rate at median useful life 100,000 h | 10 % |
| Lumen maintenance at median useful life* 100,000 h | L96 |

Application Conditions


| | |
|---------------------------|----------------|
| Ambient temperature range | -40 to +50 °C |
| Maximum dimming level | Not applicable |

Product Data

| | |
|-------------------------------------|-------------------------------------|
| Full product code | 871869637840300 |
| Order product name | BGP763 LED260-/740 I DX10 DGR 32-48 |
| EAN/UPC – product | 8718696378403 |
| Order code | 37840300 |
| SAP numerator – quantity per pack | 1 |
| SAP numerator – packs per outer box | 1 |
| Material no. (12 NC) | 910925866250 |
| SAP net weight (piece) | 12.138 kg |




Dimensional drawing

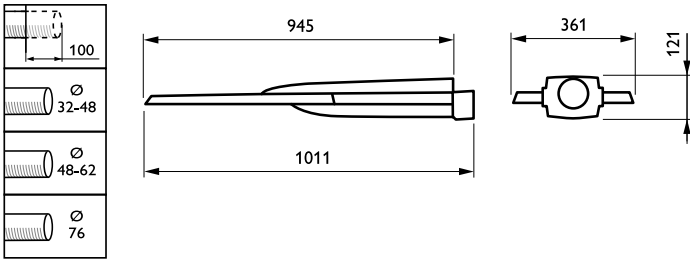

DigiStreet BGP760-BTP764

Photometric data



OFPC1_BGP763T251xLED260-4S740DX10

