



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL-D 15W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Depreciation at 500 Hours	
Cap base	G13 [Medium Bi-Pin Fluorescent]		20 %
Main application	Insect traps	Operating and Electrical	
Life to 50% failures (nom.)	8000 h	Power (Rated) (Nom)	15 W
Useful life (nom.)	5000 h	Lamp current (nom.)	0.34 A
		Voltage (Nom)	55 V
Light Technical		Approval and Application	
Colour Code	10	Mercury (Hg) content (nom.)	5.0 mg
Colour designation	Actinic	UV	
Chromaticity coordinate X (nom.)	222	UV-B/UV-A (IEC)	0.2 %
Chromaticity coordinate Y (nom.)	210		
UV Depreciation at 2,000 h	10 %		
UV depreciation at 5000 hours	15 %		

Actinic BL TL(-K)/TL-D(-K)

UV-A radiation 100 hours (IEC)	3.5 W
Product Data	
Full product code	871150071093240
Order product name	Actinic BL TL-D 15W/10 1SL/25
EAN/UPC – product	8711500710932
Order code	71093240

SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	928024801029
SAP net weight (piece)	56.570 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

TL-D 15W/10

Photometric data

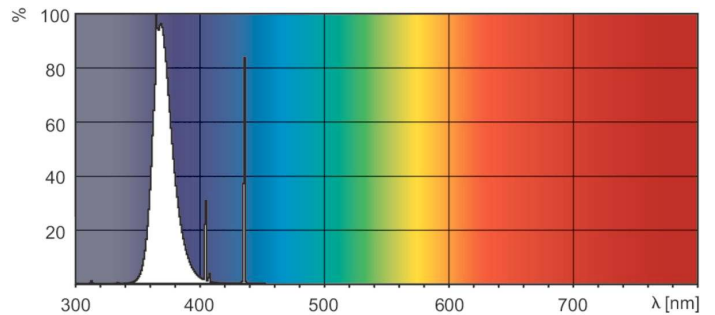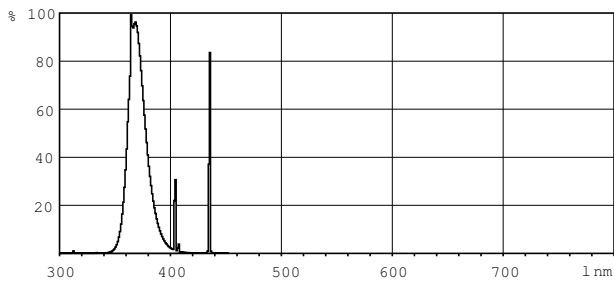

XDPB_XUBTLD_10-Spectral power distribution B/W

XDPO_XUBTLD_10-Spectral power distribution Colour

