



# Actinic BL TL-E

## Actinic BL TL-E 22W/10 1CT/20

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information		Voltage (Nom)	
Cap base	G10Q [ G10q]	62 V	
Main application	Insect traps	Approval and Application	
Life to 50% failures (nom.)	9000 h	Mercury (Hg) content (nom.)	8 mg
Useful life (nom.)	4000 h	UV	
Light Technical		UV-B/UV-A (IEC)	0.1 %
Colour Code	10	UV-A radiation 100 hours (IEC)	3.1 W
Colour designation	Ultra Violet A	Product Data	
UV Depreciation at 2,000 h	15 %	Full product code	871150028513305
Depreciation at 500 Hours	25 %	Order product name	Actinic BL TL-E 22W/10 1CT/20
Operating and Electrical		EAN/UPC – product	8711500285133
Power (Rated) (Nom)	22 W	Order code	28513305
Lamp current (nom.)	0.4 A	Numerator – quantity per pack	1

## Actinic BL TL-E

SAP numerator – packs per outer box	20
Material no. (12 NC)	928026201005
Net Weight (Piece)	0.110 kg



### Dimensional drawing



Product	D (max)	D (min)	F (max)	F (min)	E (min)	E (max)
Actinic BL TL-E 22W/10 1CT/20	30.9 mm	26.2 mm	155.6 mm	149.1 mm	205.0 mm	213.5 mm

TL-E 22W/10

### Photometric data

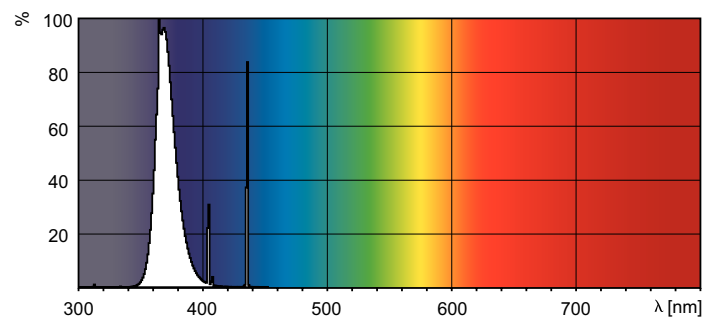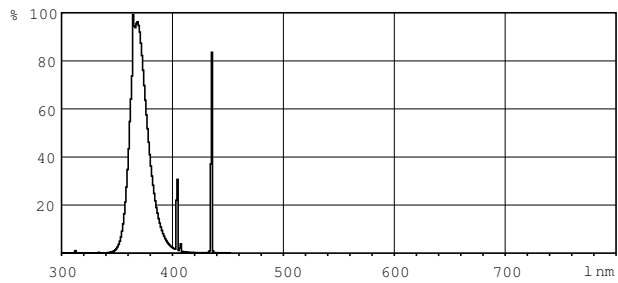

XDPB\_XURTLE\_10-Spectral power distribution B/W

XDPO\_XURTLE\_10-Spectral power distribution Colour

