



DigiStreet

BGP761 LED59-/830 II DN11 DGR D11 62

DigiStreet Mini - LED module 5900 lm - 830 warm white - Safety class II (II) - Distribution narrow 11 - Dark gray - Dimming via Lineswitch (ON= maximum output level) - Luminaire surge protection level up to 6 kV differential mode and 8 kV common mode - Spigot for diameter 62 mm

Developed with the aim of becoming your long-term partner, the system-ready architecture of DigiStreet enables you to enjoy the benefits of connected lighting systems today and also gets the city ready for the innovations to come! Its two sockets enable you to connect directly to the Philips CityTouch system and it is also prepared to connect you to the future innovations of IoT. Next to this, each individual luminaire is uniquely identifiable, thanks to the Philips Service tag application. With a simple scan of a QR code, placed on the inside of the mast door, you gain instant access to the luminaire configuration, making maintenance and programming operations faster and easier, no matter what stage of the luminaire's lifetime. DigiStreet is also equipped with dedicated light recipes that: 1) maintain optimal ecosystems for bats or 2) preserve a dark night sky.

Product data

General information	
Lamp family code	LED59 [LED module 5900 lm]
Light source colour	830 warm white
Light source replaceable	Yes
Number of gear units	1 unit
Driver/power unit/transformer	PSR-E [Power supply unit regulating external (PSR)]
Driver included	Yes
Optical cover/lens type	FG [Flat glass]

Luminaire light beam spread	53° x 71°
Control interface	-
Light regulation	Dimming via Lineswitch (ON= maximum output level)
Connection	SI [Screw connection block]
Cable	-
Protection class IEC	Safety class II (II)
Flammability mark	NO [-]
CE mark	CE mark

ENEC mark	ENEC mark
Warranty period	5 years
Optic type outdoor	Distribution narrow 11
Remarks	* At extreme ambient temperatures the luminaire might automatically dim down to protect components
Constant light output	No
Number of products on MCB (16 A type B)	11
EU RoHS compliant	Yes
Light source engine type	LED
Serviceability class	Class A, the luminaire is equipped with serviceable parts (when applicable): LED board, driver, control units, surge-protection device, optics, front cover and mechanical parts
Product family code	BGP761 [DigiStreet Mini]

Light technical

Upward light output ratio	0
Standard tilt angle post-top	0°
Standard tilt angle side entry	0°

Operating and electrical

Input Voltage	220-240 V
Input frequency	50 to 60 Hz
Inrush current	46 A
Inrush time	0.25 ms
Power factor (min.)	0.96

Controls and dimming

Dimmable	Yes
----------	-----

Mechanical and housing

Housing material	Aluminum die-cast
Reflector material	Polycarbonate
Optic material	Acrylate
Optical cover/lens material	Glass
Fixation material	Stainless steel
Mounting device	62 [Spigot for diameter 62 mm]
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	860 mm
Overall width	236 mm
Overall height	107 mm

Effective projected area	0.0666 m ²
Colour	Dark gray
Dimensions (height x width x depth)	107 x 236 x 860 mm (4.2 x 9.3 x 33.9 in)

Approval and application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK09 [10 J]
Surge protection (common/differential)	Luminaire surge protection level up to 6 kV differential mode and 8 kV common mode
Sustainability rating	-

Initial performance (IEC compliant)

Initial luminous flux (system flux)	5400 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	119 lm/W
Init. Corr. Colour Temperature	3000 K
Init. Colour rendering index	80
Initial chromaticity	(0.43, 0.40) SDCM <5
Initial input power	45.5 W
Power consumption tolerance	+/-10%
Init. colour rendering index tolerance	-2

Over time performance (IEC compliant)


Control gear failure rate at median useful life 100,000 h	10 %
Lumen maintenance at median useful life* 100,000 h	L97

Application conditions


Ambient temperature range	-40 to +50 °C
Maximum dimming level	Not applicable

Product data

Full product code	871869637696600
Order product name	BGP761 LED59-/830 II DN11 DGR D11 62
EAN/UPC – product	8718696376966
Order code	37696600
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	910925866240
Copy Net Weight (Piece)	7.610 kg




Dimensional drawing

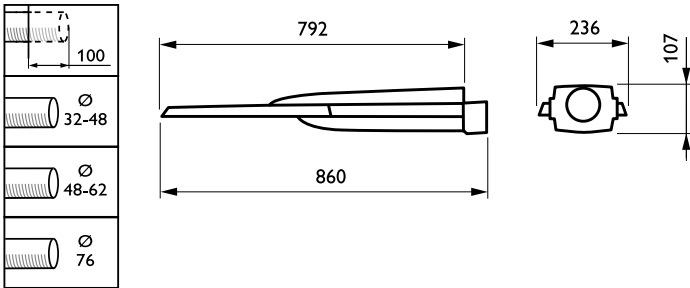

BGP761 LED59-/830 II DN11 DGR D11 62

Photometric data



OFPC1_BGP761T251xLED59-4S830DN11

