



SON

SON 70W E E27 CO 1CT/24

High Pressure Sodium lamp with opalized ovoid outer bulb

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap base	E27 [E27]
Operating position	UNIVERSAL [Any or Universal (U)]
Life to 5% failures (nom.)	12000 h
Life to 20% failures (nom.)	22000 h
Life to 50% failures (nom.)	28000 h
System description	External Ignitor (E)
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	98 %
LSF 12000 h Rated	94 %
LSF 16000 h Rated	86 %
LSF 20000 h Rated	76 %
	Sphere
Light technical	
Colour Code	220 [CCT of 2,000 K]
Luminous flux (rated) (min.)	5220 lm
Luminous flux (rated) (nom.)	5800 lm

Lumen maintenance 10,000 hours (nom.)	85 %
Lumen maintenance 2,000 hours (min.)	85 %
Lumen maintenance 2,000 hours (nom.)	93 %
Lumen maintenance 5,000 hours (min.)	80 %
Lumen maintenance 5,000 hours (nom.)	88 %
Chromaticity coordinate X (nom.)	0.540
Chromaticity coordinate Y (nom.)	0.420
Correlated Colour Temperature (Nom)	1900 K
Luminous efficacy (rated) (nom.)	80 lm/W
Color rendering index (max.)	25
Colour rendering index (nom.)	-
LLMF 2000 h Rated	93 %
LLMF 4000 h Rated	89 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	84 %
LLMF 12000 h Rated	81 %
LLMF 16000 h Rated	79 %
LLMF 20000 h Rated	78 %

Operating and electrical

Power (Rated) (Nom)	72.5 W
Lamp current (EM) (nom.)	0.950 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	1800 V
Re-ignition time (min.) (max.)	180 s
Ignition time (max.)	5 s
Voltage (Max)	105 V
Voltage (Min)	75 V
Voltage (Nom)	95 V

Controls and dimming

Dimmable	Yes
Run-up time 90% (max.)	5 min

Mechanical and housing

Lamp Finish	Coated glass
Bulb shape	BF70 [BF 70mm]

Approval and application

Energy Efficiency Class	G
Mercury (Hg) content (max.)	16.3 mg


Mercury (Hg) content (nom.)	16.3 mg
Energy consumption kWh/1,000 hours	73 kWh
	473291

Luminaire design requirements

Bulb temperature (max.)	350 °C
Cap-base temperature (max.)	200 °C
Cap-Base Temperature (Max)-DUP(do not use)	392 °F

Product data

Full product code	871150021024130
Order product name	SON 70W E E27 CO 1CT/24
EAN/UPC – product	8711500210241
Order code	21024130
SAP numerator – quantity per pack	1
Local code description	LAMPADA VAPOR DE SODIO OVOIDE 70W
Numerator – packs per outer box	24
SAP material	928486700091
Net Weight (Piece)	57.000 g


Dimensional drawing

SON 70W E E27 CO 1CT/24


Product	D (max)	C (max)
SON 70W E E27 CO 1CT/24	71 mm	156 mm

SON

Photometric data

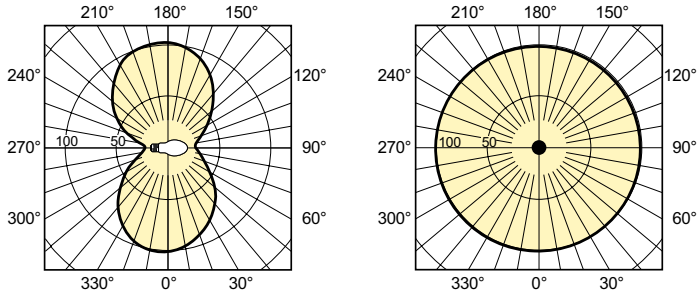


LDLD_SON-Light distribution diagram

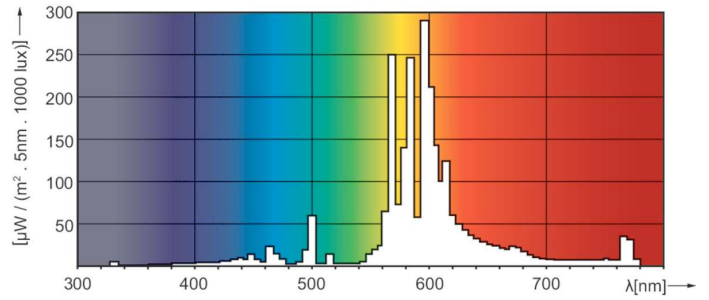


LDPO_SON-Spectral power distribution Colour

Lifetime

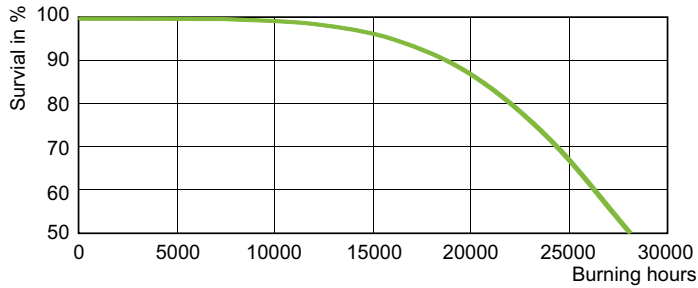

LDLE_SON_50W_70W-Life expectancy diagram

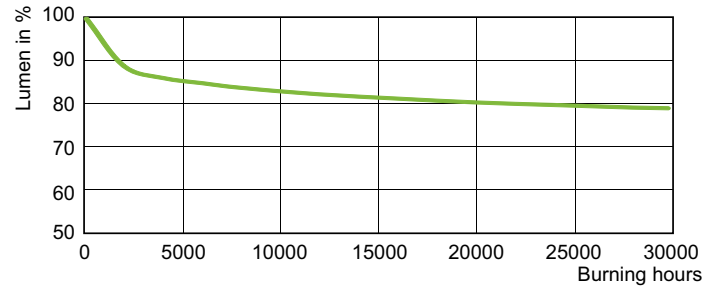

LDLM_SON_50W_70W-Lumen maintenance diagram

