



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 6W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		UV Depreciation at 2,000 h	
Cap base	G5 [G5]	UV Depreciation at 2,000 h	35 %
Main application	Insect traps	Depreciation at 500 Hours	50 %
Life to 50% failures (nom.)	10000 h	UV depreciation at 8000 hours	60 %
Useful life (nom.)	5000 h		
Light Technical		Operating and Electrical	
Colour Code	10	Power (Rated) (Nom)	6 W
Colour designation	Actinic	Lamp current (nom.)	0.16 A
Chromaticity coordinate X (nom.)	222	Voltage (Nom)	42 V
Chromaticity coordinate Y (nom.)	210		
Depreciation at 500 Hours	17 %	Approval and Application	
UV depreciation at 1,000 h	25 %	Mercury (Hg) content (nom.)	4.4 mg

Actinic BL TL(-K)/TL-D(-K)

UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	1.4 W
Product Data	
Full product code	871150026039027
Order product name	Actinic BL TL 6W/10 1FM/10X25CC
EAN/UPC – product	8711500260390

Order code	26039027
Numerator – quantity per pack	1
SAP numerator – packs per outer box	250
Material no. (12 NC)	928000501030
Net Weight (Piece)	21.000 g



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 6W/10 1FM/10X25CC	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

TL 6W/10

Photometric data

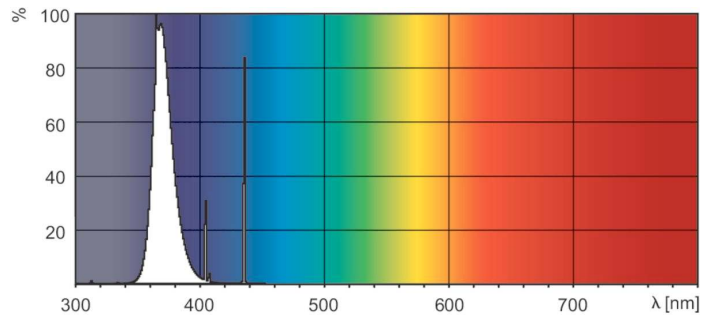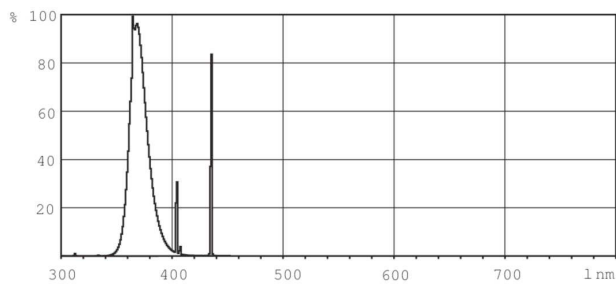

XDPB_XUVATL_10-Spectral power distribution B/W

XDPO_XUVATL_10-Spectral power distribution Colour

